




VM Flag & Stænger A/S

Bega Uplight

fra 2 - 5 tons (belægning)

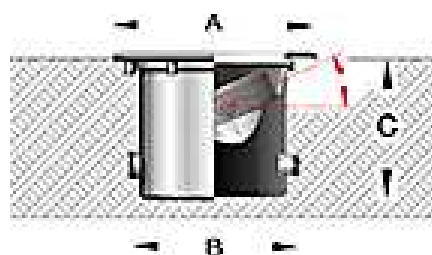

VM Flag & Stænger A/S
Stenbro Allé 5, DK - 6650 Brørup
Tlf. +45 76 60 05 00
Fax +45 75 38 25 22
CVR: 73707218
E-mail: vm-flag@vm-flag.dk
Internet: www.vm-flag.dk



VM Flag & Stænger A/S

Bega data

Drive-over in-ground floodlights

Floodlights with **adjustable** light distribution

Protection class IP 68 10 m

Pressure load **2000 kg** Installation depth **165 - 225 mm**

In-ground floodlights for

· discharge lamps HIT-TC-CE

8700 · 8650 - Lampholder GU 6.5

Cover ring and luminaire housing made of stainless steel

Safety glass · Reflector

Built-in infrared filter

2 cable glands for connecting cable \varnothing 9 -15 mm

2.5 connecting terminals

Slope angle of the reflectors adjustable from 0° - 30°.

The optical system can be rotated $\pm 180^\circ$ around the vertical axis of the luminaire.

Light distribution is adjusted to meet the requirements of the lighting situation.

8650 · 8700 with electronic ballast

8650 · 8651 narrow light beam · with built-in louvre

Glass surface temperature (T) measured according to EN 60598 at an ambient temperature of t_a 15°C

We supply any luminaire with this skid-blocking glass which is denoted by **R** after the article number.

The light distribution is more broad spread when this type of glass is used.

Pris kr. 9.950,- inkl. Lyskilde, Ekskl. moms

VM Flag & Stænger A/S
Stenbro Allé 5, DK - 6650 Brørup
Tlf. +45 76 60 05 00
Fax +45 75 38 25 22
CVR: 73707218
E-mail: vm-flag@vm-flag.dk
Internet: www.vm-flag.dk